



INNOVATIVE, EFFECTIVE COVER CROP MANAGEMENT SOLUTIONS

Cover crops prevent erosion, suppress weeds, improve water availability, supply nutrients to new crops, and more.

Maximize and manage your investment in cover cropping with Yetter Farm Equipment's industry-leading product lineup.



Knock over last year's cover crops while you plant


Attach the 5000 Stalk Devastator™ to your tractor, planter, or toolbar to roll and crimp tough cover crops in the direction of planting. Spring-loaded, chevron-patterned rollers clear the way for cash crops and create a weed-suppressing mat in just one pass.

5000 STALK DEVASTATOR COVER CROP ROLLER ATTACHMENT

- Rolls over and crimps cover crops
- Spring-loaded to follow ground contours
- Creates weed mat to preserve residue cover and reduce erosion
- Solid steel construction ensures reliability and durability

Consult Yetter dealer or sales representative for mounting options

5000 STALK DEVASTATOR SINGLE ROLLER – TORSION DOWN PRESSURE

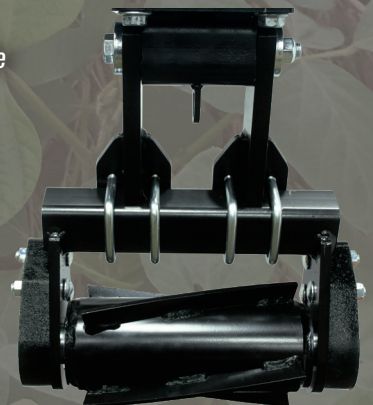

MORE HARD-WORKING COVER CROP SOLUTIONS



3700 RIDGE-TILL ROTARY HOE

- Busts crust, aerates wet residue, and prevents blowing sand
- Till an area up to 15" wide on top of ridges or strips
- Wheels spaced on approximately 3 1/4" centers across width of machine
- Spoon-bill wheel teeth mounted on individual, spring-cushioned cast arms, allowing better soil contact with each wheel
- Low horsepower requirements; can be operated at speeds of 7-10 mph
- Available with a wide array of options to fit the needs of your operation (gauge wheels, helper springs, trash guards, min-till conversion kit, and rear parking stand for folding models)



2995-108A DOUBLE-HUB COULTER

- Parallel linkage, single-arm coulters
- Utilizes 2 blades on 4" centers
- Available with CAD-tip rear fertilizer knife for liquid or dry fertilizer or spring-loaded injection
- Mounting kits available for various toolbar sizes



4000 NUTRIENT-PRO COULTER

- Minimal-disturbance fertilizer application
- Dry or liquid knives place fertilizer for pre-plant, plant, and side-dress application
- Available with 18" blades for 1 1/2" to 5" deep placement or with 20" blades for 2 1/2" to 6" deep placement
- Three down pressure settings and five quick-adjust depth settings, no tools required
- Universal mounting bracket kits fit planters as well as three-point or pull-type toolbars
- Gauge wheel depth adjusts quickly and easily
- Closing wheel kit option available

